


射频同轴转接器/ RF Coaxial Adapter

XQY-2.4mm/1.85mm-KJM

| 项目 Project | 指标 Indicators |
|------------------------------------|--------------------------------------|
| 产品名称 Product Name | 射频转接器/RF Adaptor |
| 频率范围 Frequency Range | DC-50 GHz |
| 驻波比 VSWR | 1.25:1 (max) |
| 阻抗 Impedance | 50 Ω |
| 插入损耗 Insertion Loss | 0.35dB (max) |
| 介质耐电压 Dielectric withstand voltage | 1000 V |
| 使用寿命 Service life | ≥ 500 |
| 绝缘电阻 Insulation Resistance | $\geq 5000\text{M}\Omega$ |
| A 接头类型 A connector type | 2.4mm-Female |
| B 接头类型 B connector type | 1.85mm-Male |
| 工作温度 Operation Temperature | -55°C ~ +165°C |
| 内导体材质 Inner conductor material | 铍青铜 镀金 Beryllium bronze Gold plating |
| 外导体材质 External conductor material | 不锈钢 钝化 Stainless steel Passivation |
| 绝缘体 Insulator | PEI |

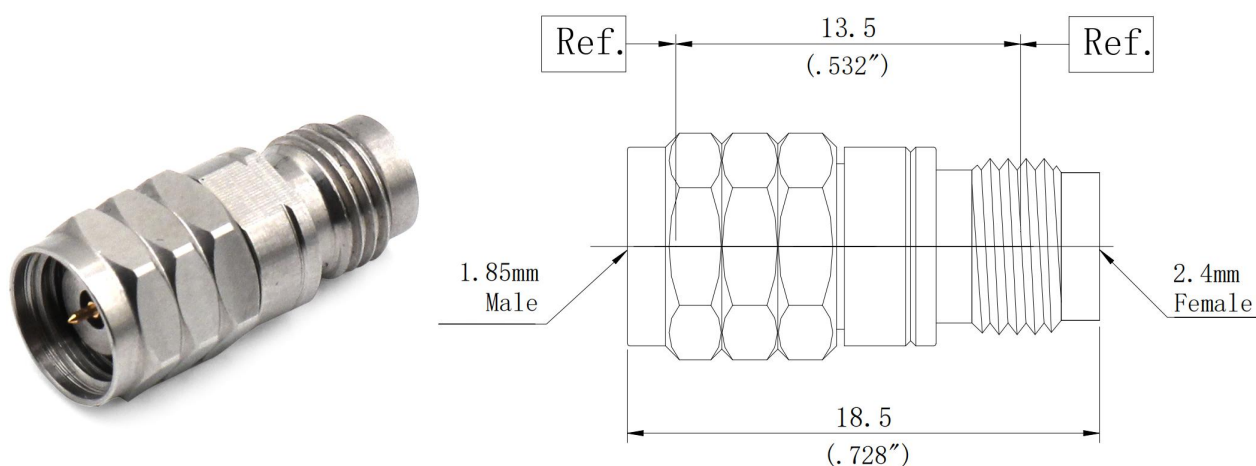

注: 尺寸(mm/[英寸]), 一般公差(± 0.1)

Note: Dimensions (mm / [inch]), General tolerance (± 0.1)